




## Features:

- 1000PSI/PN63
- Full Port
- Investment Casting
- Blow-out Proof Stem
- Locking Device Handle(Optional)
- Length Conform To DIN3202/4-M3
- Thread: ASME B1.20.1 BS21. DIN2999/259,  
ISO228-1, JIS B 0203, ISO7/1
- Inspection Testing: API598, EN12266

## Part List, Material and Dimension

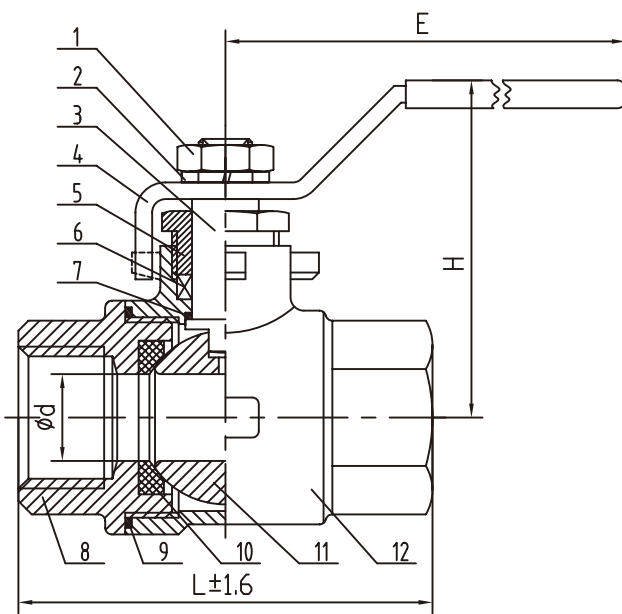

No.	Part Name	Material
1	Nut	SS304 / SS316
2	Spring Washer	SS304 / SS316
3	Stem	SS304 / SS316
4	Handle	SS201 / SS304 / SS316
5	Gland Nut	SS304 / SS316
6	Packing	PTFE / RPTFE
7	Thrush Washer	PTFE / RPTFE
8	Cap	WCB / CF8 / CF8M
9	Gasket	PTFE / RPTFE
10	Seat	PTFE / RPTFE
11	Ball	SS304 / SS316
12	Body	WCB / CF8 / CF8M

Size		ød	H	E	L
DN6	1/4"	10.5	50	95	50
DN10	3/8"	12	50	95	60
DN15	1/2"	15	60	95	75
DN20	3/4"	20	64	115	80
DN25	1"	25	71	135	90
DN32	1-1/4"	32	78	150	110
DN40	1-1/2"	38	86	160	120
DN50	2"	49	95	180	140
DN65	2-1/2"	65	130	230	185
DN80	3"	80	148	250	205
DN100	4"	100	180	285	240