



Features:

1000PSI/PN63

Full Port

Investment Casting


Blow-out Proof Stem

Thread: ASME B1.20.1 BS21.DIN2999/259,

ISO228-1, JIS B 0203,ISO7/1

Inspection Testing: API598, EN12266

Part List, Material and Dimension

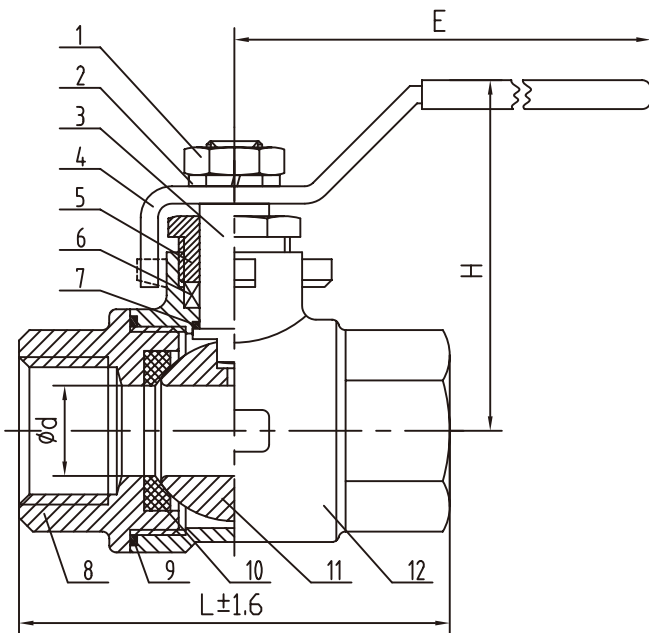

No.	Part Name	Material
1	Nut	SS304 / SS316
2	Spring Washer	SS304 / SS316
3	Stem	SS304 / SS316
4	Handle	SS201 / SS304 / SS316
5	Gland Nut	SS304 / SS316
6	Packing	PTFE / RPTFE
7	Thrush Washer	PTFE / RPTFE
8	Cap	WCB / CF8 / CF8M
9	Gasket	PTFE / RPTFE
10	Seat	PTFE / RPTFE
11	Ball	SS304 / SS316
12	Body	WCB / CF8 / CF8M

Size		ød	H	E	L
DN6	1/4"	10.5	50	95	55
DN10	3/8"	12	50	95	55
DN15	1/2"	15	60	95	62
DN20	3/4"	20	64	115	72
DN25	1"	25	71	135	84
DN32	1-1/4"	32	78	150	97
DN40	1-1/2"	38	86	160	104
DN50	2"	49	95	180	120
DN65	2-1/2"	62	130	230	150
DN80	3"	76	148	250	164
DN100	4"	96	180	285	200